

Deckrete HF

Heavy Duty Polyurethane Flooring
(6 – 10 mm)

Description

Deckrete HF is a water dispersed, polyurethane resin system to provide a anti-slip, easy to clean, dust free floor with heavy mechanical and high chemical resistance.

Uses

Deckrete HF is widely used on industrial heavy duty industrial areas such as food industry wet process areas, meat and fish processing, processed meals, dairies, breweries and wineries, soft drinks, sugar refineries and confectionery production, chemical production and many more applications.

Advantage

- Minimum downtime – tolerant of substrate moisture and fast curing
- Non-tainting
- Hygienic – will not support bacterial growth
- Easy to clean (can be steam cleaned)
- Certified by HACCP
- Extremely tough and hard wearing
- Highly temperature and thermal shock resistant
- Highly impact resistant
- Resistant to almost all chemicals
- Non-dusting

Standard Colour

Available in standard colours, other colours can be matched upon request.

Appearance

Deckrete HF is a matt colour, anti-slip floor with white fleck, which is exposed as the surface is trafficked.


Design Life

15 – 20 years, subject to proper maintenance.



Physical Properties	
Compressive Strength (ASTM C 109)	65 N/mm ²
Flexural Strength (ASTM D 790)	16 N/mm ²
Adhesive Strength (ASTM C 321)	>2.5 N/mm ²
Tensile Strength (ASTM D 638)	7 N/mm ²
Dynamic E Modulus (ASTM C 597-83)	20,000 N/mm ²
Abrasion Resistant (ASTM D 1044) Taber H-22	950 mg/1000 cycles/1kg
Coefficient of Thermal Expansion (ASTM C 531)	2.1 x 10 ⁻⁵ / °C
Thermal Conductivity (BS 874)	0.84 W/m °C
Water Absorption (CP.BM 2/67/2)	0 ml
Temperature Resistant	Dry -40 to 130°C Wet -40 to 100°C

System Design

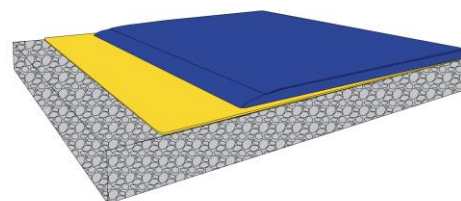

-  Deckrete HF
-  Deckrete EP
-  Substrate

Specification Detail	Coverage
Deckrete EP	0.2 kg/m ²
Deckrete HF (8mm)	16.8 kg/m ²

Substrate Requirements

Concrete or screed substrate should be a minimum of 25 N/mm², free from dust, loose particles and contaminants such as oils, fats, greases, paint residues, chemicals, algae and laitance. Substrate moisture levels should be no greater than 75% RH. BS 8204 SR 2 – 5 mm at every 3 meter.

Application

Please read Deckrete HF Method Statement for requirements of surface preparation, mixing and application.

Cure Schedule	35°C
Light Traffic	12 hours
Full Traffic	24 hours
Full Chemicals Cure	5 days

Maintenance

Regular cleaning of Deckrete HF may be carried out using a rotary scrubbing machine with a water miscible cleaning agent.

Temperature Resistance

Deckrete HF is resistant to temperature cycles up to 130°C dry heat and 100°C wet heat. Extended periods at these temperature and above will make material susceptible to chemical attack and abrasion wear.

Chemical Resistance

Please refer to the (Chemical Resistance Chart) for actual resistance to specific chemicals / reagents.

Joint Construction

Expansion joints should be continued through the Deckrete HF. If substrate movements occurs, the Deckrete HF will reflect the crack.

Technical Support

TOPKRETE offers a comprehensive range of high performance, quality products. TOPKRETE offers a technical support package to specifiers and contractors which include assistance with product selection and technical advice from staff with unrivalled experience in the industry.

Health & Safety

For further information, refer to the product Material Safety Data Sheet, available upon request.

Additional Information

Topkrete manufacturers and offers a wide range of complementary products which includes waterstop, waterproofing products, grouts, anchors, specialized flooring products. In addition, a wide range of products formulated for repair and refurbishment of spelled concrete are available.

Warranty

Topkrete Sdn Bhd warrants that the products manufactured by it shall be free from material defects and will conform to formulation standards and contain all components in their proper proportion. Should any of the products be proven defective, the liability to TOPKRETE SDN BHD shall be limited to replacement of the material proven to be defective, and TOPKRETE SDN BHD shall in no case be liable otherwise or for incidental or consequential damages. **TOPKRETE SDN BHD MAKES NO WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED.** User shall determine the suitability of the product for its intended use and assume all risks and liability in connection therewith.

Important note

Topkrete products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which may be obtained on request. Whilst Topkrete endeavors to ensure that any advice, recommendation, specification or information it may give is accurate and correct, it shall not, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance with any advice, specification, recommendation or information given by it.

Topkrete Sdn Bhd (597943-M)

Office : 19-G, Blok A, Jalan Atmosphere 3,
Pusat Perniagaan Atmosphere,
Bandar Putra Permai,
43300 Seri Kembangan,
Selangor Darul Ehsan. Malaysia
Tel: +603- 8957 8999 Fax: +603-8959 1661
Email: info@topkrete.com
www.topkrete.com

Factory : No.3, Jalan Utama 1/12,
Taman Perindustrian Puchong Utama,
47100 Puchong,
Selangor Darul Ehsan. Malaysia.
Tel : +603-8063 1883 Fax: +603-8063 1983



Product Certified by HACCP