

TOPBAND XL

Non-Woven Rubberised Self - Adhesive Tape

Description

Topband XL is a non-woven rubberized self-adhesive tape used for floor and wall joint to prevent water penetration.

Advantages

- Elastic
- Easy to apply (self-adhesive)
- Sealing the joint
- Can be coated with waterproofing product
- Excellent adhesion strength to the substrate.

Product Information


Elongation ASTM C736-000	600%
Tensile Strength ASTM C719-93	120 N/mm ²
High Pressure Water Resistance	Excellent
Thermal Shock Resistance	Excellent
Moisture Resistance	Excellent
Thickness	1mm

Application Instruction

The substrate shall free from oil, dust, moisture or other impurities material.

All uneven surfaces are required to repair prior to application of the tape.

Allow 4 – 6 hours to cure prior to any application of the subsequent material.

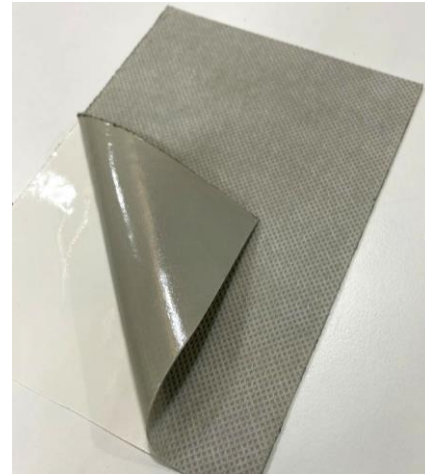

Storage

Store in a covered dry cool condition.

Does not exposed to sunlight.

Technical Support

Topkrete offers a technical support package to specifies, end-users and contractors, as well as on site technical assistance.

Health & Safety

For further information, refer to the product Material Safety Data Sheet, available upon request.

Additional Information

Topkrete manufactures and offers a wide range of complementary products which includes waterstops, waterproofing products, grouts, anchors, specialized flooring products. In addition, a wide range of products formulated for repair and refurbishment of spelled concrete are available.

Warranty

Topkrete Sdn Bhd warrants that the products manufactured by it shall be free from material defects and will conform to formulation standards and contain all components in their proper proportion. Should any of the products be proven defective, the liability to TOPKRETE SDN BHD shall be limited to replacement of the material proven to be defective, and TOPKRETE SDN BHD shall in no case be liable otherwise or for incidental or consequential damages. **TOPKRETE SDN BHD MAKES NO WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED.** User shall determine the suitability of the product for its intended use and assume all risks and liability in connection therewith.

Important note

Topkrete products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which may be obtained on request. Whilst Topkrete endeavors to ensure that any advice, recommendation, specification or information it may give is accurate and correct, it shall not, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance with any advice, specification, recommendation or information given by it.

Topkrete Sdn Bhd (597943-M)

Office : 19-G, Blok A, Jalan Atmosphere 3,
Pusat Perniagaan Atmosphere,
Bandar Putra Permai,
43300 Seri Kembangan,
Selangor Darul Ehsan. Malaysia
Tel: +603- 8957 8999 Fax: +603-895 1661
Email: info@topkrete.com
www.topkrete.com

Factory : No.3, Jalan Utama 1/12,
Taman Perindustrian Puchong Utama,
47100 Puchong,
Selangor Darul Ehsan. Malaysia.
Tel : +603-8063 1883 Fax: +603-8063 1983